



AC607

FIRE STOP

ACRYLIC SEALANT



Minimum
240
minutes
fire resistance



Expands in volume at temperatures exceeding 120°C reduce heat transfer.

More Than **240** mins. Fire Resistance

AKIM
SEALANTS & ADHESIVES

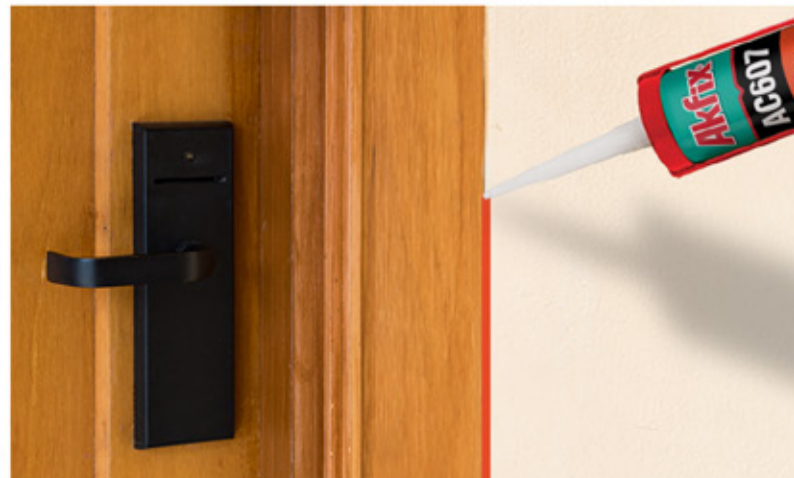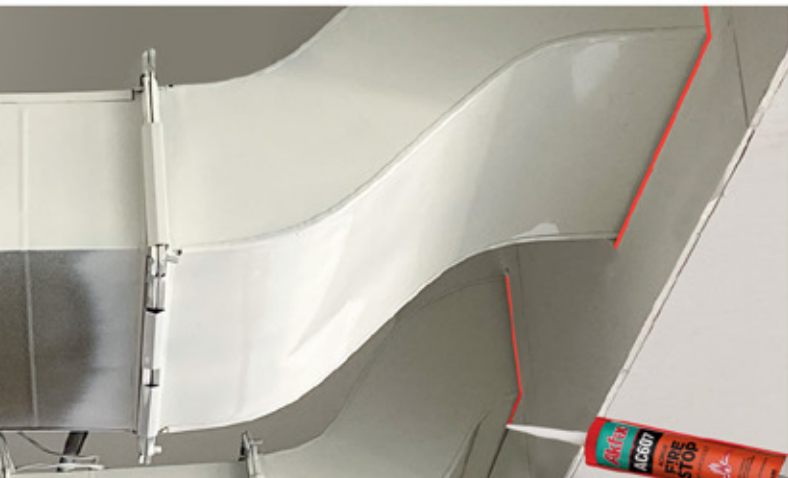

Akfix[®]
■ MASTER OF SOLUTIONS ■

**CREATES
PERMANENT
SOLUTIONS**

www.akfix.com / info@akfix.com



FIRE RATED RESISTANT ACRYLIC SEALANT

It is formulated to help prevent the passage of fire, smoke and toxic gases.

- Minimum 240 minutes fire resistance according to TS-EN 1366-4.
- It can be used easily in gaps up to 50 mm.
- Paintable and adhesion to many building materials without primer, does not affect the filled surface.
- Cable tray penetrations, metal pipe penetrations, brick wall, concrete, insulation in joint gaps of various main materials such as drywall and metal used for the purpose.
- It is water based, environmentally friendly.
- It is resistant to weather conditions.
- It maintains its flexibility for a long time.



KTL_203_AC607_BROSUR_A4_TR_EN

Akfix[®]
MASTER OF SOLUTIONS



www.Akfix.com
info@akfix.com

    /Akfixsealants